



Safe Flooring Solutions

GRATING STAIR TREADS

Tread Code	Tread Description
PT1	Welded Fixing - no nosing
PT2	Bolted Fixing - no nosing
PT3	Welded Fixing - floor plate nosing
PT4	Bolted Fixing - floor plate nosing
PT5	Welded Fixing - abrasive nosing
PT6	Bolted Fixing - abrasive nosing
PT7	Welded Fixing - perforated nosing
PT8	Bolted Fixing - perforated nosing

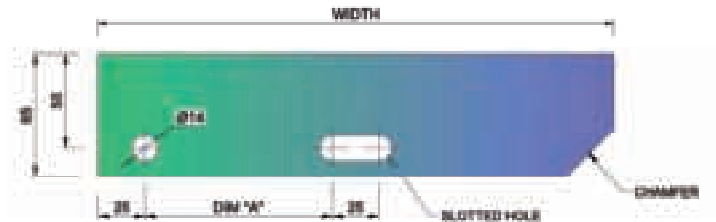


■ Fibreglass Grating Stair Treads also available

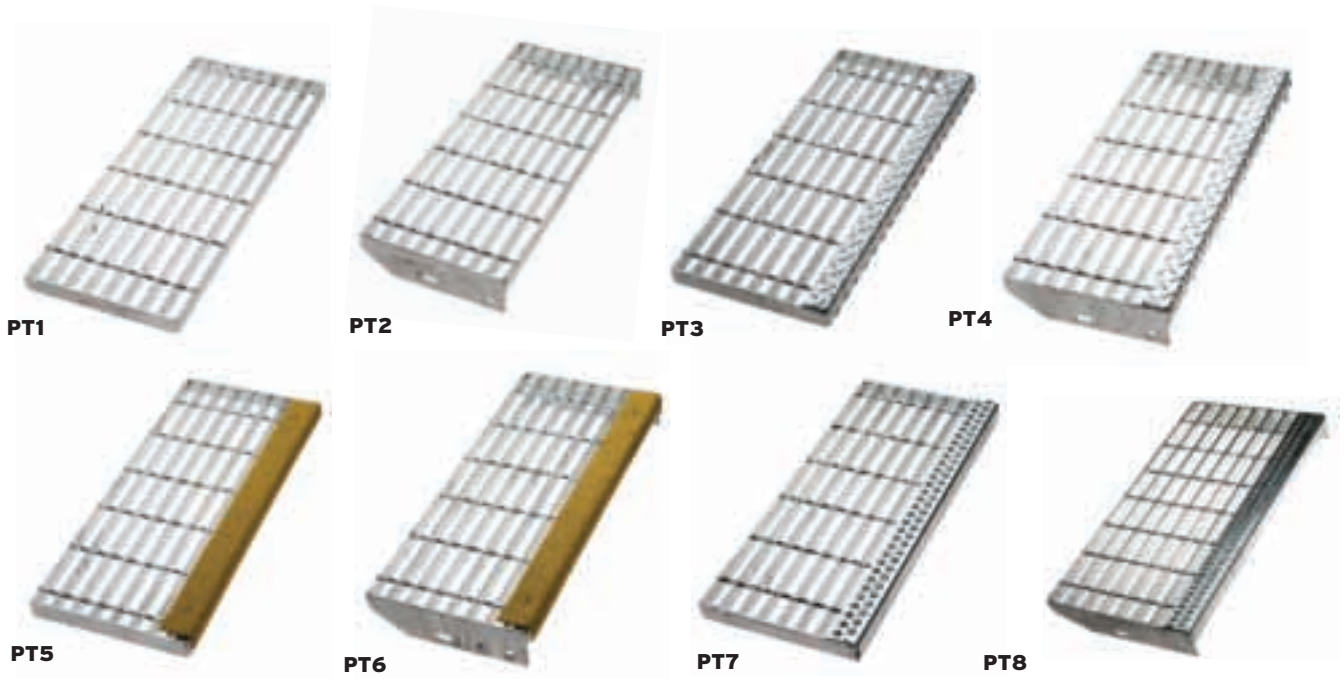

Recommended Standard Widths								
Dim 'A'	Hole Centres	45	75	75	100	100	100	100
Welded 30/Preslok 30	PT2 - PT8	125	155	185	215	245	275	305
Welded 40/Preslok 40	PT2 - PT8	125	165		205	245	285	325
Welded 60/Preslok 60	PT2 - PT8	125		185		245		305

Recommended Maximum Length			
Load Bar Size	25 x 5	32 x 5	40 x 5
Series 30	900	1300	1600
Series 40	750	1200	1500
Series 60	500	800	1300

Nosing options can be retrofitted to grating stair treads, as below

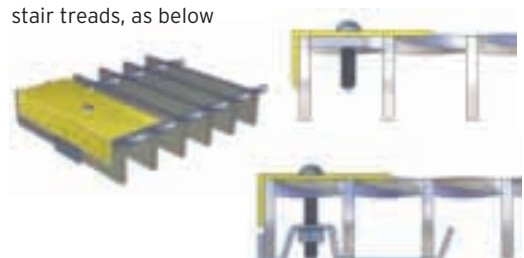

When ordering treads, please nominate type of grating required, eg PT3 - 750 x 275 (made from W30A-255)